

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
09/847,487	05/02/2001	Alex S.Y. Koh	SC11499TS	6254

23125 7590 08/23/2004

FREESCALE SEMICONDUCTOR, INC.
LAW DEPARTMENT
7700 WEST PARMER LANE MD:TX32/PL02
AUSTIN, TX 78729

EXAMINER

THANGAVELU, KANDASAMY

ART UNIT	PAPER NUMBER
----------	--------------

2123

DATE MAILED: 08/23/2004

Please find below and/or attached an Office communication concerning this application or proceeding.

Office Action Summary

Application No.

09/847,487

Applicant(s)

KOH ET AL.

Examiner

Kandasamy Thangavelu

Art Unit

2123

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --

Period for Reply

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE 3 MONTH(S) FROM THE MAILING DATE OF THIS COMMUNICATION.

- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication.
- If the period for reply specified above is less than thirty (30) days, a reply within the statutory minimum of thirty (30) days will be considered timely.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133). Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).

Status

- 1) ☒ Responsive to communication(s) filed on 02 May 2001.
- 2a) ☐ This action is **FINAL**. 2b) ☒ This action is non-final.
- 3) ☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

Disposition of Claims

- 4) ☒ Claim(s) 1-27 is/are pending in the application.
- 4a) Of the above claim(s) _____ is/are withdrawn from consideration.
- 5) ☐ Claim(s) _____ is/are allowed.
- 6) ☒ Claim(s) 1-27 is/are rejected.
- 7) ☐ Claim(s) _____ is/are objected to.
- 8) ☐ Claim(s) _____ are subject to restriction and/or election requirement.

Application Papers

- 9) ☒ The specification is objected to by the Examiner.
- 10) ☒ The drawing(s) filed on 02 May 2001 is/are: a) ☒ accepted or b) ☐ objected to by the Examiner.
Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).
Replacement drawing sheet(s) including the correction is required if the drawing(s) is objected to. See 37 CFR 1.121(d).
- 11) ☐ The oath or declaration is objected to by the Examiner. Note the attached Office Action or form PTO-152.

Priority under 35 U.S.C. § 119

- 12) ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
- a) ☐ All b) ☐ Some * c) ☐ None of:
- ☐ Certified copies of the priority documents have been received.
 - ☐ Certified copies of the priority documents have been received in Application No. _____.
 - ☐ Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).
- * See the attached detailed Office action for a list of the certified copies not received.

Attachment(s)

- 1) ☒ Notice of References Cited (PTO-892)
- 2) ☐ Notice of Draftsperson's Patent Drawing Review (PTO-948)
- 3) ☐ Information Disclosure Statement(s) (PTO-1449 or PTO/SB/08)
Paper No(s)/Mail Date _____.
- 4) ☐ Interview Summary (PTO-413)
Paper No(s)/Mail Date. _____.
- 5) ☐ Notice of Informal Patent Application (PTO-152)
- 6) ☐ Other: _____.

DETAILED ACTION

1. Claims 1-27 of the application have been examined.

Drawings

2. The drawings submitted on May 2, 2001 are accepted.

Specification

3. The disclosure is objected to because of the following informalities:

Page 6, Lines 7-8, "There may other examples of post processing tools as well" appears to be incorrect and it appears that it should be "There may be other examples of post processing tools as well".

Appropriate correction is required.

Claim Rejections - 35 USC § 112

4. The following is a quotation of the second paragraph of 35 U.S.C. 112:

The specification shall conclude with one or more claims particularly pointing out and distinctly claiming the subject matter which the applicant regards as his invention.

Art Unit: 2123

5. Claim 18-21 are rejected under 35 U.S.C. 112, second paragraph, as being indefinite for failing to particularly point out and distinctly claim the subject matter which applicant regards as the invention.

Claim 18 recites in the preamble "A data pattern generator stored via a computer readable medium". This could imply that the applicant is storing a table in a computer readable medium. However, the components listed in the limitations are pluralities of instructions. It is recommended that the preamble be modified to reflect that what is stored in the computer readable medium is a program product.

Claims 19-20 recite the limitation "The method of claim 18" in Line 1 of the claim. There is insufficient antecedent basis for this limitation in the claim. Claim 18 refers to "A data pattern generator stored via a computer readable medium" and not a method.

Claim 21 recites the limitation "The method of claim 20" in Line 1 of the claim. There is insufficient antecedent basis for this limitation in the claim. Claim 20 refers to "The method of claim 18"; but Claim 18 refers to "A data pattern generator stored via a computer readable medium" and not a method.

6. Claim 23-27 are rejected under 35 U.S.C. 112, second paragraph, as being indefinite for failing to particularly point out and distinctly claim the subject matter which applicant regards as the invention.

Claims 23-27 recite the limitation " The method of claim 22" in Line 1 of the claim. There is insufficient antecedent basis for this limitation in the claim. Claim 22 refers to

Art Unit: 2123

“A standard reusable test bench stored via a computer readable medium” and not a method.

Claim Rejections - 35 USC § 101

7. 35 U.S.C. 101 reads as follows:

Whoever invents or discovers any new and useful process, machine, manufacture, or composition of matter, or any new and useful improvement thereof, may obtain a patent therefor, subject to the conditions and requirements of this title.

8. Claims 18 and 22 are rejected under 35 U.S.C. 101 because the claimed inventions are directed to non-statutory subject matter.

Independent claim 18 recites, “A data pattern generator stored via a computer readable medium, comprising a first plurality of instructions”. The limitations recited in claim contain computer instructions for executing various steps and a computer readable medium that stores the computer instructions which are not statutory subject matter. To be statutory, the computer readable medium should include computer executable instructions which when executed in a computer performs a process comprising the steps included in the limitations.

Independent claim 22 recites, “A standard reusable test bench stored via a computer readable medium, comprising a first plurality of instructions. The limitations recited in claim contain computer instructions for executing various steps and a computer readable medium that stores the computer instructions which are not statutory subject matter. To be statutory, the

Art Unit: 2123

computer readable medium should include computer executable instructions which when executed in a computer performs a process comprising the steps included in the limitations.

Claim Rejections - 35 USC § 103

9. The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all obviousness rejections set forth in this Office action:

(a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains.

10. The factual inquiries set forth in *Graham v. John Deere Co.*, 383 U.S. 1, 148 USPQ 459 (1966), that are applied for establishing a background for determining obviousness under 35 U.S.C. 103(a) are summarized as follows:

1. Determining the scope and contents of the prior art.
2. Ascertaining the differences between the prior art and the claims at issue.
3. Resolving the level of ordinary skill in the pertinent art.
4. Considering objective evidence present in the application indicating obviousness or nonobviousness.

11. Claims 1-10, 12, 13, 18, 19 and 22-26 are rejected under 35 U.S.C. 103(a) as being unpatentable over **Araki et al.** (U.S. Patent Application 2001/0007972) in view of **Reise et al.** (U.S. Patent 6,678,625).

Art Unit: 2123

11.1 **Araki et al.** teaches Method and apparatus for verifying adequacy of test patterns.

Specifically, as per claim 1, **Araki et al.** teaches a method for capturing simulation output (Page 1, Para 0003); comprising:

providing a stimulus to a test bench (Page 1, Para 0003);

providing a device model corresponding to an integrated circuit to the test bench (Page 1, Para 0006 and 0003); and

in response to applying the stimulus to the device model through the test bench, generating a captured simulation (Page 1, Para 0003); the captured simulation comprising information related to at least one of strobe timing information (Page 3, Para 0022), mixed signal information (Page 1, Para 0005), and internal memory content information (Page 1, Para 0005).

Araki et al. does not expressly teach the captured simulation comprising information related to one of opcode information. **Reise et al.** teaches the captured simulation comprising information related to one of opcode information (Fig. 4, Item 416; CL6, L55-61), because the opcode information instructs the DUT what type of I/O instruction to perform before the data is transferred on a read or write operation (CL6, L59-61). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Reise et al.** that included the captured simulation comprising information related to one of opcode information. The artisan would have been motivated because the opcode information would instruct the DUT what type of I/O instruction to perform before the data was transferred on a read or write operation.

Art Unit: 2123

Per claim 2: **Araki et al.** teaches that the captured simulation comprises sufficient information for automatically generating a complete test pattern within a test program corresponding to the integrated circuit (Page 1, Para 0005).

Per claim 3: **Araki et al.** teaches that the captured simulation captures all communication through the test bench between the stimulus and the device model (Page 1, Para 0003 and Para 0006).

11.2 As per Claim 4, **Araki et al.** and **Reise et al.** teach the method of claim 1. **Araki et al.** does not expressly teach that the stimulus and the test bench communicate in accordance with a predetermined protocol which provides a standard interface between the stimulus and the test bench. **Reise et al.** teaches that the stimulus and the test bench communicate in accordance with a predetermined protocol which provides a standard interface between the stimulus and the test bench (Fig. 4 and Fig. 8; CL6, L49-57; CL7, L53-63; CL8, L24-29), because that allows the test bench to communicate with the stimulus and the DUT through a channel using standard interface such as PCI or SCSI, so the operation of the DUT may be tested and verified (CL7, L53-63; CL8, L24-29). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Reise et al.** that included the stimulus and the test bench communicating in accordance with a predetermined protocol which provided a standard interface between the stimulus and the test bench. The artisan would have been motivated because that would allow the test bench to communicate with the stimulus and the DUT through a channel using standard interface such as PCI or SCSI, so the operation of the DUT may be tested and verified.

Art Unit: 2123

11.3 As per Claim 5, **Araki et al.** and **Reise et al.** teach the method of claim 1. **Araki et al.** does not expressly teach that the device model and the test bench communicate in accordance with a predetermined protocol which provides a standard interface between the device model and the test bench. **Reise et al.** teaches that the device model and the test bench communicate in accordance with a predetermined protocol which provides a standard interface between the device model and the test bench (Fig. 4 and Fig. 8; CL6, L49-57; CL7, L53-63; CL8, L24-29), because that allows the test bench to communicate with the stimulus and the DUT through a channel using standard interface such as PCI or SCSI, so the operation of the DUT may be tested and verified (CL7, L53-63; CL8, L24-29). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Reise et al.** that included the device model and the test bench communicating in accordance with a predetermined protocol which provided a standard interface between the device model and the test bench. The artisan would have been motivated because that would allow the test bench to communicate with the stimulus and the DUT through a channel using standard interface such as PCI or SCSI, so the operation of the DUT may be tested and verified.

11.4 As per Claim 6, **Araki et al.** and **Reise et al.** teach the method of claim 5. **Araki et al.** does not expressly teach that communication with the device model occurs through the standard interface between the device model and the test bench. **Reise et al.** teaches that communication with the device model occurs through the standard interface between the device model and the test bench (Fig. 4 and Fig. 8; CL6, L49-57; CL7, L53-63; CL8, L24-29), because that allows the

Art Unit: 2123

test bench to communicate with the stimulus and the DUT through a channel using standard interface such as PCI or SCSI, so the operation of the DUT may be tested and verified (CL7, L53-63; CL8, L24-29). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Reise et al.** that included communication with the device model occurring through the standard interface between the device model and the test bench. The artisan would have been motivated because that would allow the test bench to communicate with the stimulus and the DUT through a channel using standard interface such as PCI or SCSI, so the operation of the DUT may be tested and verified.

Per claim 7: **Araki et al.** teaches that the stimulus comprises verification patterns, drivers, and monitors (Page 1, Para 0003, Para 0005 and Para 0006).

In addition, **Lin et al.** (U.S. Patent 6.651,225) also teaches that the stimulus comprises verification patterns, drivers, and monitors (CL22, L15-16; CL22, L57-59).

Per claim 8: **Araki et al.** teaches that the stimulus further comprises a simulation environment corresponding to the device model (Page 1, Para 0006).

Per claim 9: **Araki et al.** teaches that in response to applying the stimulus to the device model through the test bench, the test bench generates a plurality of simulation parameters corresponding to the stimulus and device model (Page 1, Para 0003, Para 0005; Page 3, Para 0022); and

Art Unit: 2123

the captured simulation is based at least in part on the simulation parameters (Page 1, Para 0003, Para 0005; Page 3, Para 0022).

11.5 As per Claim 10, **Araki et al.** and **Reise et al.** teach the method of claim 1. **Araki et al.** teaches that the captured simulation comprises information relating to another one of strobe timing information (Page 3, Para 0022), mixed signal information (Page 1, Para 0005), and internal memory content information (Page 1, Para 0005).

Araki et al. does not expressly teach that the captured simulation comprises information related to another one of opcode information. **Reise et al.** teaches that the captured simulation comprises information related to another one of opcode information (Fig. 4, Item 416; CL6, L55-61), because the opcode information instructs the DUT what type of I/O instruction to perform before the data is transferred on a read or write operation (CL6, L59-61). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Reise et al.** that included the captured simulation comprising information related to another one of opcode information. The artisan would have been motivated because the opcode information would instruct the DUT what type of I/O instruction to perform before the data was transferred on a read or write operation.

11.6 As per claim 12, **Araki et al.** teaches a method for preparing a captured simulation for post-processing (Page 1, Para 0003 and Para 0005; Page 1, Para 0011); comprising:

Art Unit: 2123

receiving the captured simulation (Page 1, Para 0003); wherein the captured simulation comprises at least one of strobe timing information (Page 3, Para 0022), mixed signal information (Page 1, Para 0005), and internal memory content information (Page 1, Para 0005);

the captured simulation generated in response to stimulus applied to a device model through a test bench (Page 1, Para 0003);

generating data patterns (Fig. 5, Item 31, 33 and 34; Page 1, Para 0011; Page 2, Para 12 and 13), based at least in part on the one of strobe timing information (Page 3, Para 0022), mixed signal information (Page 1, Para 0005), and internal memory content information (Page 1, Para 0005);

the data patterns capable of being retargettable for a plurality of post-processing tools (Fig. 5, Item 31, 33, 34 and 10); and

providing a first formatted pattern file to a first post-processing tool, the first formatted pattern file based on the data patterns (Fig. 5, Item 31).

Araki et al. does not expressly teach that the captured simulation comprises at least one of opcode information; and generating data patterns based at least in part on the one of opcode information. **Reise et al.** teaches that the captured simulation comprises at least one of opcode information; and generating data patterns based at least in part on the one of opcode information (Fig. 4, Item 416; CL6, L55-61), because the opcode information instructs the DUT what type of I/O instruction to perform before the data is transferred on a read or write operation (CL6, L59-61). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Reise et al.** that included the captured simulation comprising at least one of opcode information; and generating data patterns

Art Unit: 2123

based at least in part on the one of opcode information. The artisan would have been motivated because the opcode information would instruct the DUT what type of I/O instruction to perform before the data was transferred on a read or write operation.

11.7 As per Claim 13, **Araki et al.** and **Reise et al.** teach the method of claim 12. **Araki et al.** teaches that the captured simulation comprises another one of strobe timing information (Page 3, Para 0022), mixed signal information (Page 1, Para 0005), and internal memory content information (Page 1, Para 0005); and

generating the data patterns (Fig. 5, Item 31, 33 and 34; Page 1, Para 0011; Page 2, Para 12 and 13), is further based at least in part on the another one of strobe timing information (Page 3, Para 0022), mixed signal information (Page 1, Para 0005), and internal memory content information (Page 1, Para 0005).

Araki et al. does not expressly teach that the captured simulation comprises another one of opcode information; and generating data patterns is further based at least in part on the another one of opcode information. **Reise et al.** teaches that that the captured simulation comprises another one of opcode information; and generating data patterns is further based at least in part on the another one of opcode information (Fig. 4, Item 416; CL6, L55-61), because the opcode information instructs the DUT what type of I/O instruction to perform before the data is transferred on a read or write operation (CL6, L59-61). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Reise et al.** that included the captured simulation comprising another one of opcode information; and generating data patterns further based at least in part on the another one

Art Unit: 2123

of opcode information. The artisan would have been motivated because the opcode information would instruct the DUT what type of I/O instruction to perform before the data was transferred on a read or write operation.

11.8 As per claim 18, **Araki et al.** teaches a data pattern generator stored via a computer readable medium (Fig. 5, Items 32 and 33); comprising:

a first plurality of instructions for receiving the captured simulation (Page 1, Para 0003); wherein the captured simulation comprises at least one of strobe timing information (Page 3, Para 0022), mixed signal information (Page 1, Para 0005), and internal memory content information (Page 1, Para 0005);

the captured simulation generated in response to stimulus applied to a device model through a test bench (Page 1, Para 0003);

a second plurality of instructions for generating data patterns (Fig. 5, Item 31, 33 and 34; Page 1, Para 0011; Page 2, Para 12 and 13), based at least in part on the one of strobe timing information (Page 3, Para 0022), mixed signal information (Page 1, Para 0005), and internal memory content information (Page 1, Para 0005);

the data patterns capable of being retargettable for a plurality of post-processing tools (Fig. 5, Item 31, 33, 34 and 10); and

a third plurality of instructions for providing a first formatted pattern file to a first post-processing tool, the first formatted pattern file based on the data patterns (Fig. 5, Item 31).

Araki et al. does not expressly teach that the captured simulation comprises at least one of opcode information; and generating data patterns based at least in part on the one of opcode

Art Unit: 2123

information. **Reise et al.** teaches that the captured simulation comprises at least one of opcode information; and generating data patterns based at least in part on the one of opcode information (Fig. 4, Item 416; CL6, L55-61), because the opcode information instructs the DUT what type of I/O instruction to perform before the data is transferred on a read or write operation (CL6, L59-61). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Reise et al.** that included the captured simulation comprising at least one of opcode information; and generating data patterns based at least in part on the one of opcode information. The artisan would have been motivated because the opcode information would instruct the DUT what type of I/O instruction to perform before the data was transferred on a read or write operation.

11.9 As per Claim 19, **Araki et al.** and **Reise et al.** teach the method of claim 18. **Araki et al.** teaches that the captured simulation comprises another one of strobe timing information (Page 3, Para 0022), and mixed signal information (Page 1, Para 0005); and

generating the data patterns (Fig. 5, Item 31, 33 and 34; Page 1, Para 0011; Page 2, Para 12 and 13), is further based at least in part on the another one of strobe timing information (Page 3, Para 0022), and mixed signal information (Page 1, Para 0005).

Araki et al. does not expressly teach that the captured simulation comprises another one of opcode information; and generating data patterns is further based at least in part on the another one of opcode information. **Reise et al.** teaches that that the captured simulation comprises another one of opcode information; and generating data patterns is further based at least in part on the another one of opcode information (Fig. 4, Item 416; CL6, L55-61), because the opcode

Art Unit: 2123

information instructs the DUT what type of I/O instruction to perform before the data is transferred on a read or write operation (CL6, L59-61). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Reise et al.** that included the captured simulation comprising another one of opcode information; and generating data patterns further based at least in part on the another one of opcode information. The artisan would have been motivated because the opcode information would instruct the DUT what type of I/O instruction to perform before the data was transferred on a read or write operation.

11.10 As per claim 22, **Araki et al.** teaches standard test bench stored via a computer readable medium (Page 1, Para 0003; Fig. 5); comprising:

- a first plurality of instructions for receiving a stimulus (Page 1, Para 0003);

- a second plurality of instructions for receiving a device model corresponding to an integrated circuit (Page 1, Para 0003 and Para 0006);

- a third plurality of instructions for generating simulation parameters in response to applying the stimulus to the device model (Page 1, Para 0003 and Para 0005; Page 3, Para 0022);

- a fourth plurality of instructions for creating a captured simulation based at least in part on the simulation parameters (Page 1, Para 0003 and Para 0005; Page 3, Para 0022);

- the captured simulation comprising information related to at least one of strobe timing information (Page 3, Para 0022), mixed signal information (Page 1, Para 0005), and internal memory content information (Page 1, Para 0005).

Art Unit: 2123

Araki et al. does not expressly teach that standard test bench stored via a computer readable medium is reusable. **Reise et al.** teaches that standard test bench stored via a computer readable medium is reusable (Abstract, L11-13; CL1, L60-63; CL1, L32-35), because a standardized, parameterized and reusable test bench may be readily configured for multiple device models in a design verification test environment (CL1, L32-35). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the standard test bench of **Araki et al.** with the standard test bench of **Reise et al.** that included the standard test bench stored via a computer readable medium being reusable. The artisan would have been motivated because a standardized, parameterized and reusable test bench might be readily configured for multiple device models in a design verification test environment.

Araki et al. does not expressly teach the captured simulation comprising information related to at least one of opcode information. **Reise et al.** teaches the captured simulation comprising information related to at least one of opcode information (Fig. 4, Item 416; CL6, L55-61), because the opcode information instructs the DUT what type of I/O instruction to perform before the data is transferred on a read or write operation (CL6, L59-61). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the standard test bench of **Araki et al.** with the standard test bench of **Reise et al.** that included the captured simulation comprising information related to at least one of opcode information. The artisan would have been motivated because the opcode information would instruct the DUT what type of I/O instruction to perform before the data was transferred on a read or write operation.

Art Unit: 2123

Per claim 23: **Araki et al.** teaches that the captured simulation comprises sufficient information for automatically generating a complete test within a test program corresponding to the integrated circuit (Page 1, Para 0005).

11.11 As per Claims 24 and 25, **Araki et al.** and **Reise et al.** teach the method of claim 22.

Araki et al. teaches that the captured simulation captures all communication between the stimulus and the device model through the standard test bench; and all communication with the device model occurs through the standard test bench (Page 1, Para 0003 and Para 0006).

Araki et al. does not expressly teach that standard test bench is reusable. **Reise et al.** teaches that standard test bench is reusable (Abstract, L11-13; CL1, L60-63; CL1, L32-35), because a standardized, parameterized and reusable test bench may be readily configured for multiple device models in a design verification test environment (CL1, L32-35). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the standard test bench of **Araki et al.** with the standard test bench of **Reise et al.** that included the standard test bench being reusable. The artisan would have been motivated because a standardized, parameterized and reusable test bench might be readily configured for multiple device models in a design verification test environment.

11.12 As per Claim 26, **Araki et al.** and **Reise et al.** teach the method of claim 22. **Araki et al.** teaches that the captured simulation comprises information relating to another one of strobe timing information (Page 3, Para 0022), mixed signal information (Page 1, Para 0005), and internal memory content information (Page 1, Para 0005).

Araki et al. does not expressly teach that the captured simulation comprises information related to another one of opcode information. **Reise et al.** teaches that the captured simulation comprises information related to another one of opcode information (Fig. 4, Item 416; CL6, L55-61), because the opcode information instructs the DUT what type of I/O instruction to perform before the data is transferred on a read or write operation (CL6, L59-61). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Reise et al.** that included the captured simulation comprising information related to another one of opcode information. The artisan would have been motivated because the opcode information would instruct the DUT what type of I/O instruction to perform before the data was transferred on a read or write operation.

12. Claims 11, 14 and 27 are rejected under 35 U.S.C. 103(a) as being unpatentable over **Araki et al.** (U.S. Patent Application 2001/0007972) in view of **Reise et al.** (U.S. Patent 6,678,625), and further in view of **Lesmeister et al.** (U.S. Patent 6,295,623) and **Fusco** (U.S. Patent 6,308,292).

12.1 As per Claim 11, **Araki et al.** and **Reise et al.** teach the method of claim 1. **Araki et al.** does not expressly teach that the captured simulation further comprises information relating to at least one of directionality information. **Lesmeister et al.** teaches that the captured simulation further comprises information relating to at least one of directionality information (CL6, L37-

Art Unit: 2123

46), because the direction information is used to identify the signal as the input signal or the response signal (output signal) (CL6, L37-40; CL7, L54 to CL8, L2). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Lesmeister et al.** that included the captured simulation further comprising information relating to at least one of directionality information. The artisan would have been motivated because the direction information would be used to identify the signal as the input signal or the response signal (output signal).

Araki et al. does not expressly teach that the captured simulation further comprises information relating to at least one of pin data information. **Lesmeister et al.** teaches that the captured simulation further comprises information relating to at least one of pin data information (CL4, L20-24), because the pin data relates each pin of the real integrated circuit to an IC input or output signal of the device model and indicates how the IC pin is connected to the tester (CL4, L20-24). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Lesmeister et al.** that included the captured simulation further comprising information relating to at least one of pin data information. The artisan would have been motivated because the pin data would relate each pin of the real integrated circuit to an IC input or output signal of the device model and indicate how the IC pin would be connected to the tester.

Araki et al. does not expressly teach that the captured simulation further comprises information relating to at least one of masking information. **Fusco** teaches that the captured simulation further comprises information relating to at least one of masking information (Fig. 3; Abstract, L2-5; CL4, L20-25; CL5, L8-15), because masking information would allow the

Art Unit: 2123

expected output in a test pattern to be coded such that the tester does not compare the output signal with the expected data and always passes the masked output signal during the masked cycle (CL4, L20-25). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Fusco** that included the captured simulation further comprising information relating to at least one of masking information. The artisan would have been motivated because masking information would allow the expected output in a test pattern to be coded such that the tester would not compare the output signal with the expected data and would always pass the masked output signal during the masked cycle.

Araki et al. does not expressly teach that the captured simulation further comprises information relating to at least one of partial cyclized information. **Lesmeister et al.** teaches that the captured simulation further comprises information relating to at least one of partial cyclized information (CL7, L54 to CL8, L6), because the cyclized information restricts the state changes in each simulated input signal and in sampling each simulated IC output signal to one particular time during each system clock signal cycle (CL7, L65 to CL8, L2). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Lesmeister et al.** that included the captured simulation further comprising information relating to at least one of partial cyclized information. The artisan would have been motivated because the cyclized information would restrict the state changes in each simulated input signal and in sampling each simulated IC output signal to one particular time during each system clock signal cycle.

Art Unit: 2123

12.2 As per Claim 14, **Araki et al.** and **Reise et al.** teach the method of claim 12. **Araki et al.** does not expressly teach that the captured simulation further comprises information relating to at least one of directionality information. **Lesmeister et al.** teaches that the captured simulation further comprises information relating to at least one of directionality information (CL6, L37-46), because the direction information is used to identify the signal as the input signal or the response signal (output signal) (CL6, L37-40; CL7, L54 to CL8, L2). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Lesmeister et al.** that included the captured simulation further comprising information relating to at least one of directionality information. The artisan would have been motivated because the direction information would be used to identify the signal as the input signal or the response signal (output signal).

Araki et al. does not expressly teach that the captured simulation further comprises information relating to at least one of pin data information. **Lesmeister et al.** teaches that the captured simulation further comprises information relating to at least one of pin data information (CL4, L20-24), because the pin data relates each pin of the real integrated circuit to an IC input or output signal of the device model and indicates how the IC pin is connected to the tester (CL4, L20-24). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Lesmeister et al.** that included the captured simulation further comprising information relating to at least one of pin data information. The artisan would have been motivated because the pin data would relate each pin of the real integrated circuit to an IC input or output signal of the device model and indicate how the IC pin would be connected to the tester.

Art Unit: 2123

Araki et al. does not expressly teach that the captured simulation further comprises information relating to at least one of masking information. **Fusco** teaches that the captured simulation further comprises information relating to at least one of masking information (Fig. 3; Abstract, L2-5; CL4, L20-25; CL5, L8-15), because masking information would allow the expected output in a test pattern to be coded such that the tester does not compare the output signal with the expected data and always passes the masked output signal during the masked cycle (CL4, L20-25). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Fusco** that included the captured simulation further comprising information relating to at least one of masking information. The artisan would have been motivated because masking information would allow the expected output in a test pattern to be coded such that the tester would not compare the output signal with the expected data and would always pass the masked output signal during the masked cycle.

Araki et al. does not expressly teach that the captured simulation further comprises information relating to at least one of partial cyclized information. **Lesmeister et al.** teaches that the captured simulation further comprises information relating to at least one of partial cyclized information (CL7, L54 to CL8, L6), because the cyclized information restricts the state changes in each simulated input signal and in sampling each simulated IC output signal to one particular time during each system clock signal cycle (CL7, L65 to CL8, L2). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Lesmeister et al.** that included the captured simulation further comprising information relating to at least one of partial cyclized information. The artisan would

Art Unit: 2123

have been motivated because the cyclized information would restrict the state changes in each simulated input signal and in sampling each simulated IC output signal to one particular time during each system clock signal cycle.

12.3 As per Claim 27, **Araki et al.** and **Reise et al.** teach the method of claim 22. **Araki et al.** does not expressly teach that the captured simulation further comprises information relating to at least one of directionality information. **Lesmeister et al.** teaches that the captured simulation further comprises information relating to at least one of directionality information (CL6, L37-46), because the direction information is used to identify the signal as the input signal or the response signal (output signal) (CL6, L37-40; CL7, L54 to CL8, L2). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Lesmeister et al.** that included the captured simulation further comprising information relating to at least one of directionality information. The artisan would have been motivated because the direction information would be used to identify the signal as the input signal or the response signal (output signal).

Araki et al. does not expressly teach that the captured simulation further comprises information relating to at least one of pin data information. **Lesmeister et al.** teaches that the captured simulation further comprises information relating to at least one of pin data information (CL4, L20-24), because the pin data relates each pin of the real integrated circuit to an IC input or output signal of the device model and indicates how the IC pin is connected to the tester (CL4, L20-24). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Lesmeister et al.**

Art Unit: 2123

that included the captured simulation further comprising information relating to at least one of pin data information. The artisan would have been motivated because the pin data would relate each pin of the real integrated circuit to an IC input or output signal of the device model and indicate how the IC pin would be connected to the tester.

Araki et al. does not expressly teach that the captured simulation further comprises information relating to at least one of masking information. **Fusco** teaches that the captured simulation further comprises information relating to at least one of masking information (Fig. 3; Abstract, L2-5; CL4, L20-25; CL5, L8-15), because masking information would allow the expected output in a test pattern to be coded such that the tester does not compare the output signal with the expected data and always passes the masked output signal during the masked cycle (CL4, L20-25). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Fusco** that included the captured simulation further comprising information relating to at least one of masking information. The artisan would have been motivated because masking information would allow the expected output in a test pattern to be coded such that the tester would not compare the output signal with the expected data and would always pass the masked output signal during the masked cycle.

Araki et al. does not expressly teach that the captured simulation further comprises information relating to at least one of partial cyclized information. **Lesmeister et al.** teaches that the captured simulation further comprises information relating to at least one of partial cyclized information (CL7, L54 to CL8, L6), because the cyclized information restricts the state changes in each simulated input signal and in sampling each simulated IC output signal to one particular

Art Unit: 2123

time during each system clock signal cycle (CL7, L65 to CL8, L2). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Lesmeister et al.** that included the captured simulation further comprising information relating to at least one of partial cyclized information. The artisan would have been motivated because the cyclized information would restrict the state changes in each simulated input signal and in sampling each simulated IC output signal to one particular time during each system clock signal cycle.

13. Claim 15 is rejected under 35 U.S.C. 103(a) as being unpatentable over **Araki et al.** (U.S. Patent Application 2001/0007972) in view of **Reise et al.** (U.S. Patent 6,678,625), and further in view of **Lesmeister et al.** (U.S. Patent 6,295,623).

13.1 As per Claim 15, **Araki et al.** and **Reise et al.** teach the method of claim 12. **Araki et al.** does not expressly teach that the data patterns include cyclized patterns. **Lesmeister et al.** teaches that the data patterns include cyclized patterns (CL7, L54 to CL8, L6), because the cyclized information restricts the state changes in each simulated input signal and in sampling each simulated IC output signal to one particular time during each system clock signal cycle (CL7, L65 to CL8, L2). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Lesmeister et al.** that included the data patterns including cyclized patterns. The artisan would have been motivated because the cyclized information would restrict the state changes in each simulated

Art Unit: 2123

input signal and in sampling each simulated IC output signal to one particular time during each system clock signal cycle.

14. Claims 16, 17, 20 and 21 are rejected under 35 U.S.C. 103(a) as being unpatentable over **Araki et al.** (U.S. Patent Application 2001/0007972) in view of **Reise et al.** (U.S. Patent 6,678,625), and further in view of **Fusco** (U.S. Patent 6,308,292).

14.1 As per Claim 16, **Araki et al.** and **Reise et al.** teach the method of claim 12. **Araki et al.** teaches that the first post-processing tool is one of a fault simulator (Page 1, Para 0001. L9-10), and virtual tester (Fig. 5, Item 10; Page 2, Para 0013; Page 2-3, Para 0022).

Araki et al. does not expressly teach that the first post-processing tool is one of an automatic test equipment (ATE) tester. **Fusco** teaches that the first post-processing tool is one of an automatic test equipment (ATE) tester (CL1, L61-65; CL2, L24-39), because the post processing tool analyzes the simulation results and generates the test files including test patterns containing IC input patterns and output patterns used by the automatic test equipment (CL2, L24-29). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Fusco** that included the first post-processing tool being one of an automatic test equipment (ATE) tester. The artisan would have been motivated because the post processing tool would analyze the simulation results and generate the test files including test patterns containing IC input patterns and output patterns used by the automatic test equipment.

Art Unit: 2123

14.2 As per Claim 17, **Araki et al.**, **Reise et al.** and **Fusco** each the method of claim 16.

Araki et al. teaches providing a second formatted pattern file to a second post-processing tool, the second formatted pattern file based on the data patterns (Fig. 5, Item 21); and

the second post-processing tool is another one of a fault simulator (Page 1, Para 0001. L9-10), and virtual tester (Fig. 5, Item 10; Page 2, Para 0013; Page 2-3, Para 0022).

Araki et al. does not expressly teach that the second post-processing tool is another one of an automatic test equipment (ATE) tester. **Fusco** teaches that the second post-processing tool is another one of an automatic test equipment (ATE) tester (CL1, L61-65; CL2, L24-39), because the post processing tool analyzes the simulation results and generates the test files including test patterns containing IC input patterns and output patterns used by the automatic test equipment (CL2, L24-29). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Fusco** that included the second post-processing tool being another one of an automatic test equipment (ATE) tester. The artisan would have been motivated because the post processing tool would analyze the simulation results and generate the test files including test patterns containing IC input patterns and output patterns used by the automatic test equipment.

14.3 As per Claim 20, **Araki et al.** and **Reise et al.** teach the method of claim 18. **Araki et al.** teaches that the first post-processing tool is one of a fault simulator (Page 1, Para 0001. L9-10), and virtual tester (Fig. 5, Item 10; Page 2, Para 0013; Page 2-3, Para 0022).

Art Unit: 2123

Araki et al. does not expressly teach that the first post-processing tool is one of an automatic test equipment (ATE) tester. **Fusco** teaches that the first post-processing tool is one of an automatic test equipment (ATE) tester (CL1, L61-65; CL2, L24-39), because the post processing tool analyzes the simulation results and generates the test files including test patterns containing IC input patterns and output patterns used by the automatic test equipment (CL2, L24-29). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Fusco** that included the first post-processing tool being one of an automatic test equipment (ATE) tester. The artisan would have been motivated because the post processing tool would analyze the simulation results and generate the test files including test patterns containing IC input patterns and output patterns used by the automatic test equipment.

14.4 As per Claim 21, **Araki et al.**, **Reise et al.** and **Fusco** each the method of claim 20.

Araki et al. teaches a fourth plurality of instructions for providing a second formatted pattern file to a second post-processing tool, the second formatted pattern file based on the data patterns (Fig. 5, Item 21); and

the second post-processing tool is another one of a fault simulator (Page 1, Para 0001. L9-10), and virtual tester (Fig. 5, Item 10; Page 2, Para 0013; Page 2-3, Para 0022).

Araki et al. does not expressly teach that the second post-processing tool is another one of an automatic test equipment (ATE) tester. **Fusco** teaches that the second post-processing tool is another one of an automatic test equipment (ATE) tester (CL1, L61-65; CL2, L24-39),

Art Unit: 2123

because the post processing tool analyzes the simulation results and generates the test files including test patterns containing IC input patterns and output patterns used by the automatic test equipment (CL2, L24-29). It would have been obvious to one of ordinary skill in the art at the time of Applicants' invention to modify the method of **Araki et al.** with the method of **Fusco** that included the second post-processing tool being another one of an automatic test equipment (ATE) tester. The artisan would have been motivated because the post processing tool would analyze the simulation results and generate the test files including test patterns containing IC input patterns and output patterns used by the automatic test equipment.

Conclusion


15. Any inquiry concerning this communication or earlier communications from the examiner should be directed to Dr. Kandasamy Thangavelu whose telephone number is 703-305-0043. The examiner can normally be reached on Monday through Friday from 8:00 AM to 5:30 PM.

If attempts to reach examiner by telephone are unsuccessful, the examiner's supervisor, Kevin Teska, can be reached on (703) 305-9704. The fax phone number for the organization where this application or proceeding is assigned is 703-872-9306.

Art Unit: 2123

Any inquiry of a general nature or relating to the status of this application or proceeding should be directed to the receptionist whose telephone number is 703-305-9600.

K. Thangavelu
Art Unit 2123
August 12, 2004

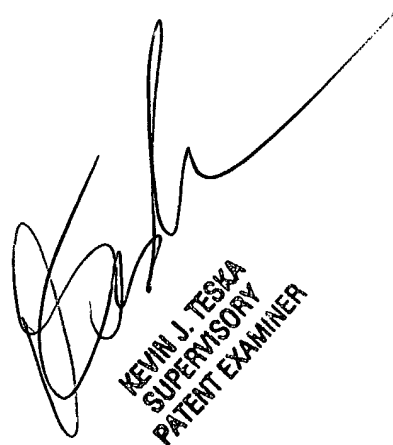

KEVIN J. TESKA
SUPERVISORY
PATENT EXAMINER